




- NOTES:**
1. HYDRO, TELECOMMUNICATION PROVIDER, GAS AND SL CORRIDOR TO HAVE MINIMUM COVER OF 1.0m.
  2. WATERMAIN TO HAVE MINIMUM COVER OF 1.7m.
  3. IF UTILITIES CANNOT BE INSTALLED ACCORDING TO THIS STANDARD, THEY ARE TO BE INSTALLED AS CLOSE AS POSSIBLE TO THE PRESCRIBED LOCATION SUBJECT TO THE APPROVAL OF THE TRANSPORTATION AND WORKS DEPARTMENT OF THE CITY OF MISSISSAUGA.
  4. A 0.4m-0.6m CLEARANCE MUST BE MAINTAINED BETWEEN CABLES AND HYDRANTS.
  5. A 0.3m CLEARANCE MUST BE MAINTAINED BETWEEN WATERMANS AND UTILITY POLES.
  6. NO TRANSFORMERS TO BE PLACED IN ROW.
  7. CONCRETE BARRIER CURB WITH STANDARD GUTTER PER OPSD 600.070. CONCRETE BARRIER CURB WITH NARROW GUTTER PER OPSD 600.080. MOUNTABLE CONCRETE CURB WITH STANDARD GUTTER PER CITY OF MISSISSAUGA STD. 2230.030.

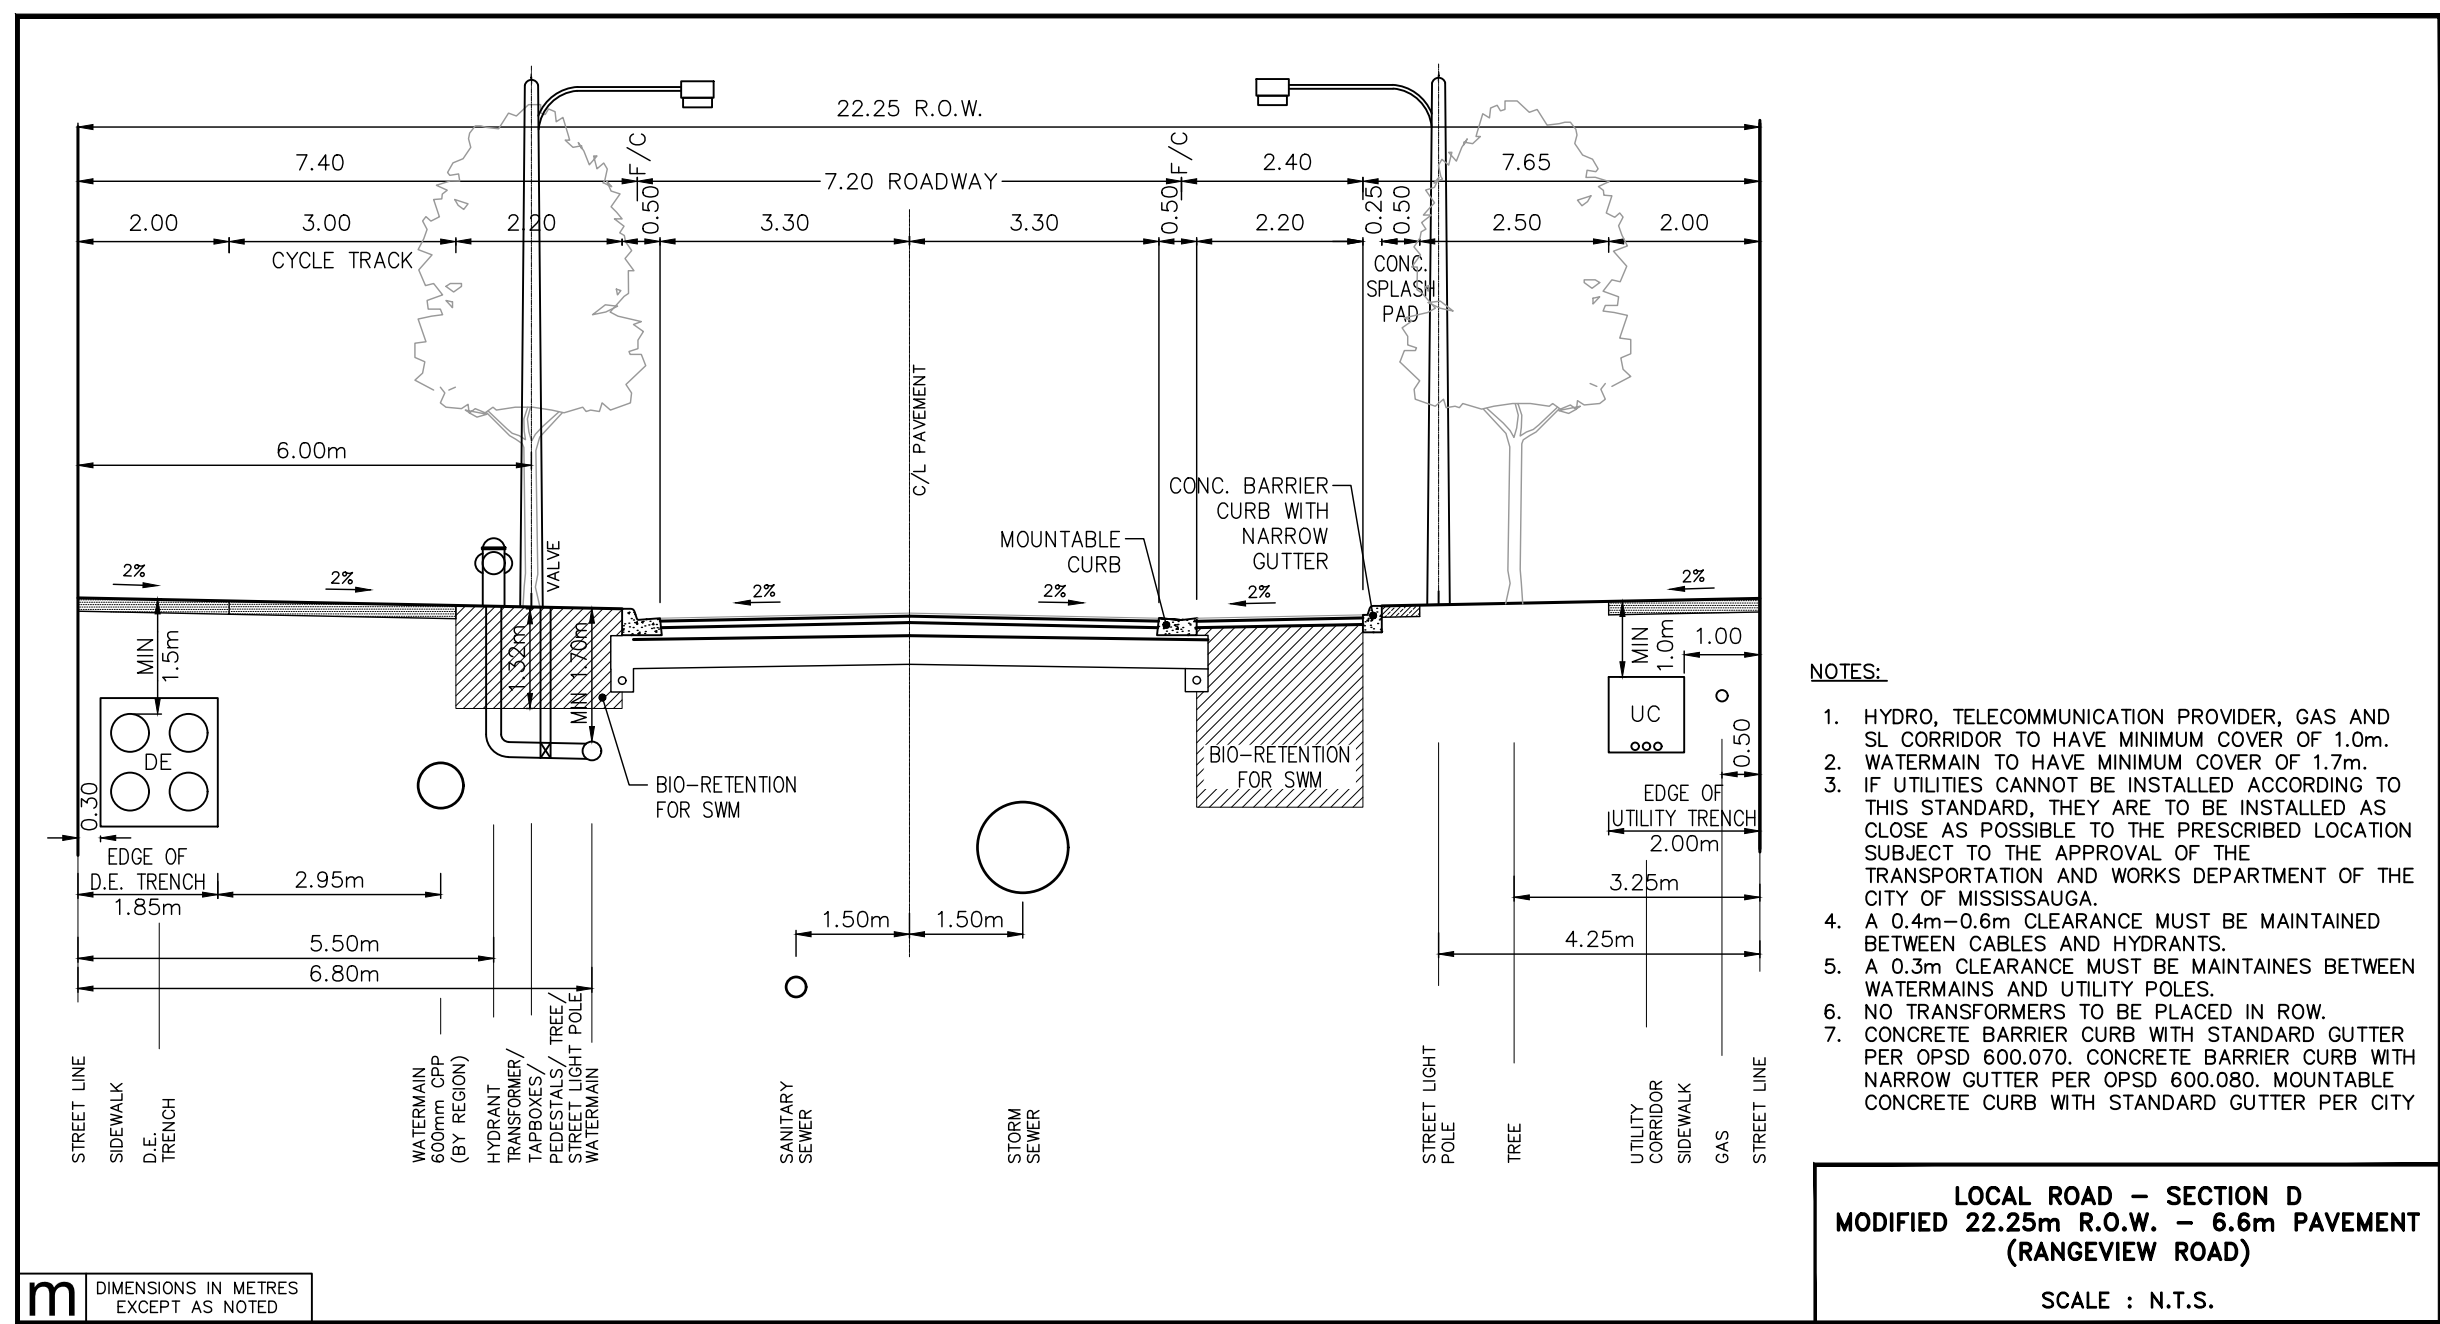


- NOTES:**
1. HYDRO, TELECOMMUNICATION PROVIDER, GAS AND SL CORRIDOR TO HAVE MINIMUM COVER OF 1.0m.
  2. WATERMAIN TO HAVE MINIMUM COVER OF 1.7m.
  3. IF UTILITIES CANNOT BE INSTALLED ACCORDING TO THIS STANDARD, THEY ARE TO BE INSTALLED AS CLOSE AS POSSIBLE TO THE PRESCRIBED LOCATION SUBJECT TO THE APPROVAL OF THE TRANSPORTATION AND WORKS DEPARTMENT OF THE CITY OF MISSISSAUGA.
  4. A 0.4m-0.6m CLEARANCE MUST BE MAINTAINED BETWEEN CABLES AND HYDRANTS.
  5. A 0.3m CLEARANCE MUST BE MAINTAINED BETWEEN WATERMANS AND UTILITY POLES.
  6. NO TRANSFORMERS TO BE PLACED IN ROW.
  7. CONCRETE BARRIER CURB WITH STANDARD GUTTER PER OPSD 600.070. CONCRETE BARRIER CURB WITH NARROW GUTTER PER OPSD 600.080. MOUNTABLE CONCRETE CURB WITH STANDARD GUTTER PER CITY OF MISSISSAUGA STD. 2230.030.

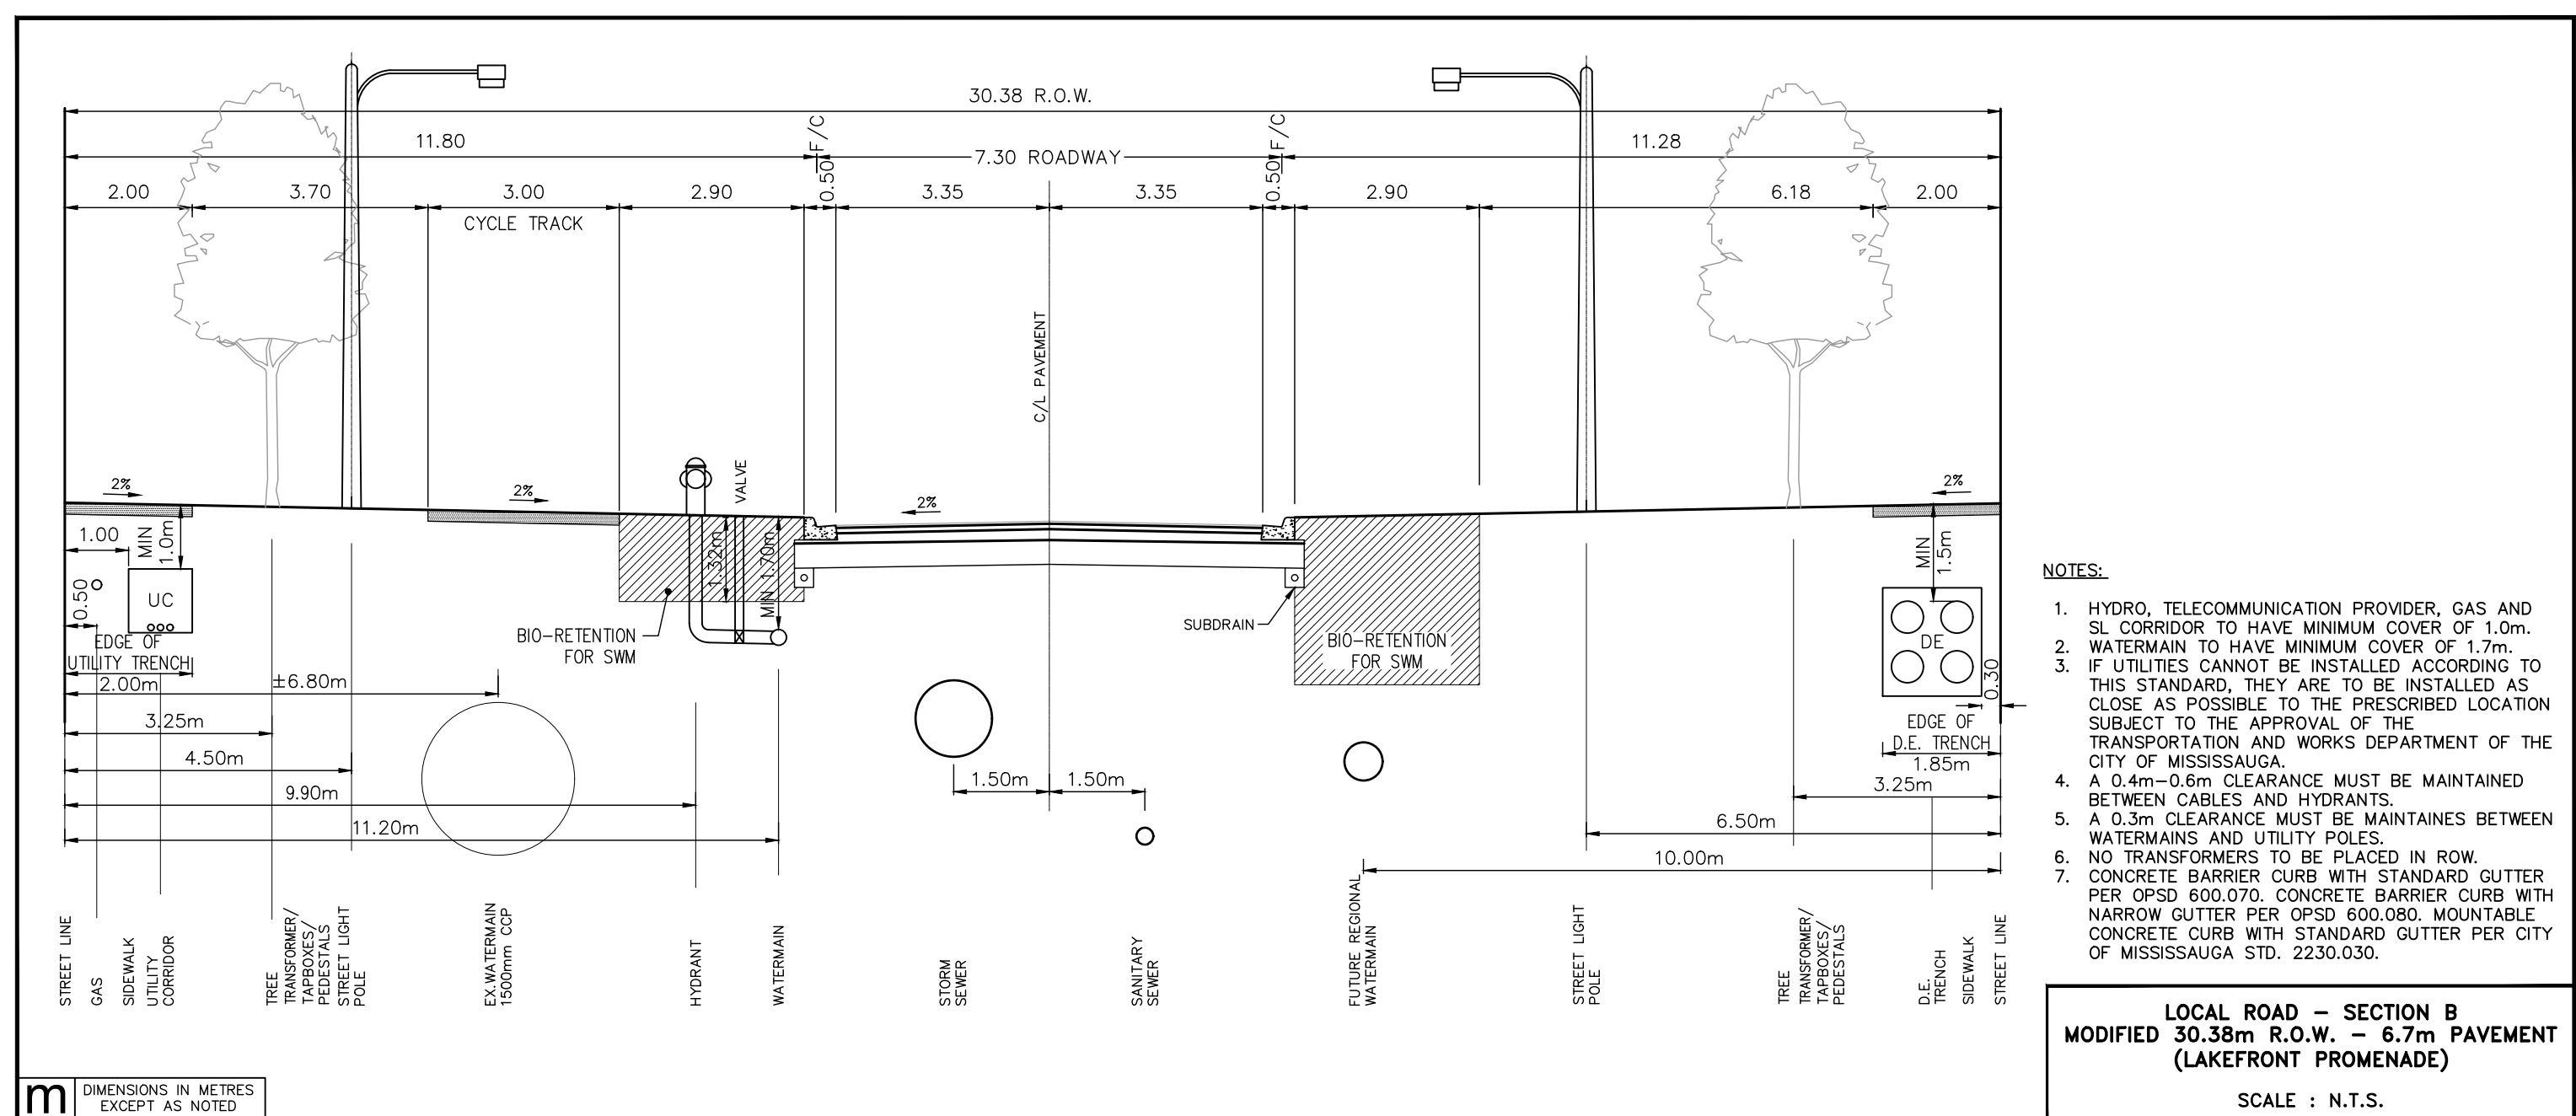


- NOTES:**
1. HYDRO, TELECOMMUNICATION PROVIDER, GAS AND SL CORRIDOR TO HAVE MINIMUM COVER OF 1.0m.
  2. WATERMAIN TO HAVE MINIMUM COVER OF 1.7m.
  3. IF UTILITIES CANNOT BE INSTALLED ACCORDING TO THIS STANDARD, THEY ARE TO BE INSTALLED AS CLOSE AS POSSIBLE TO THE PRESCRIBED LOCATION SUBJECT TO THE APPROVAL OF THE TRANSPORTATION AND WORKS DEPARTMENT OF THE CITY OF MISSISSAUGA.
  4. A 0.4m-0.6m CLEARANCE MUST BE MAINTAINED BETWEEN CABLES AND HYDRANTS.
  5. A 0.3m CLEARANCE MUST BE MAINTAINED BETWEEN WATERMANS AND UTILITY POLES.
  6. NO TRANSFORMERS TO BE PLACED IN ROW.
  7. CONCRETE BARRIER CURB WITH STANDARD GUTTER PER OPSD 600.070. CONCRETE BARRIER CURB WITH NARROW GUTTER PER OPSD 600.080. MOUNTABLE CONCRETE CURB WITH STANDARD GUTTER PER CITY OF MISSISSAUGA STD. 2230.030.

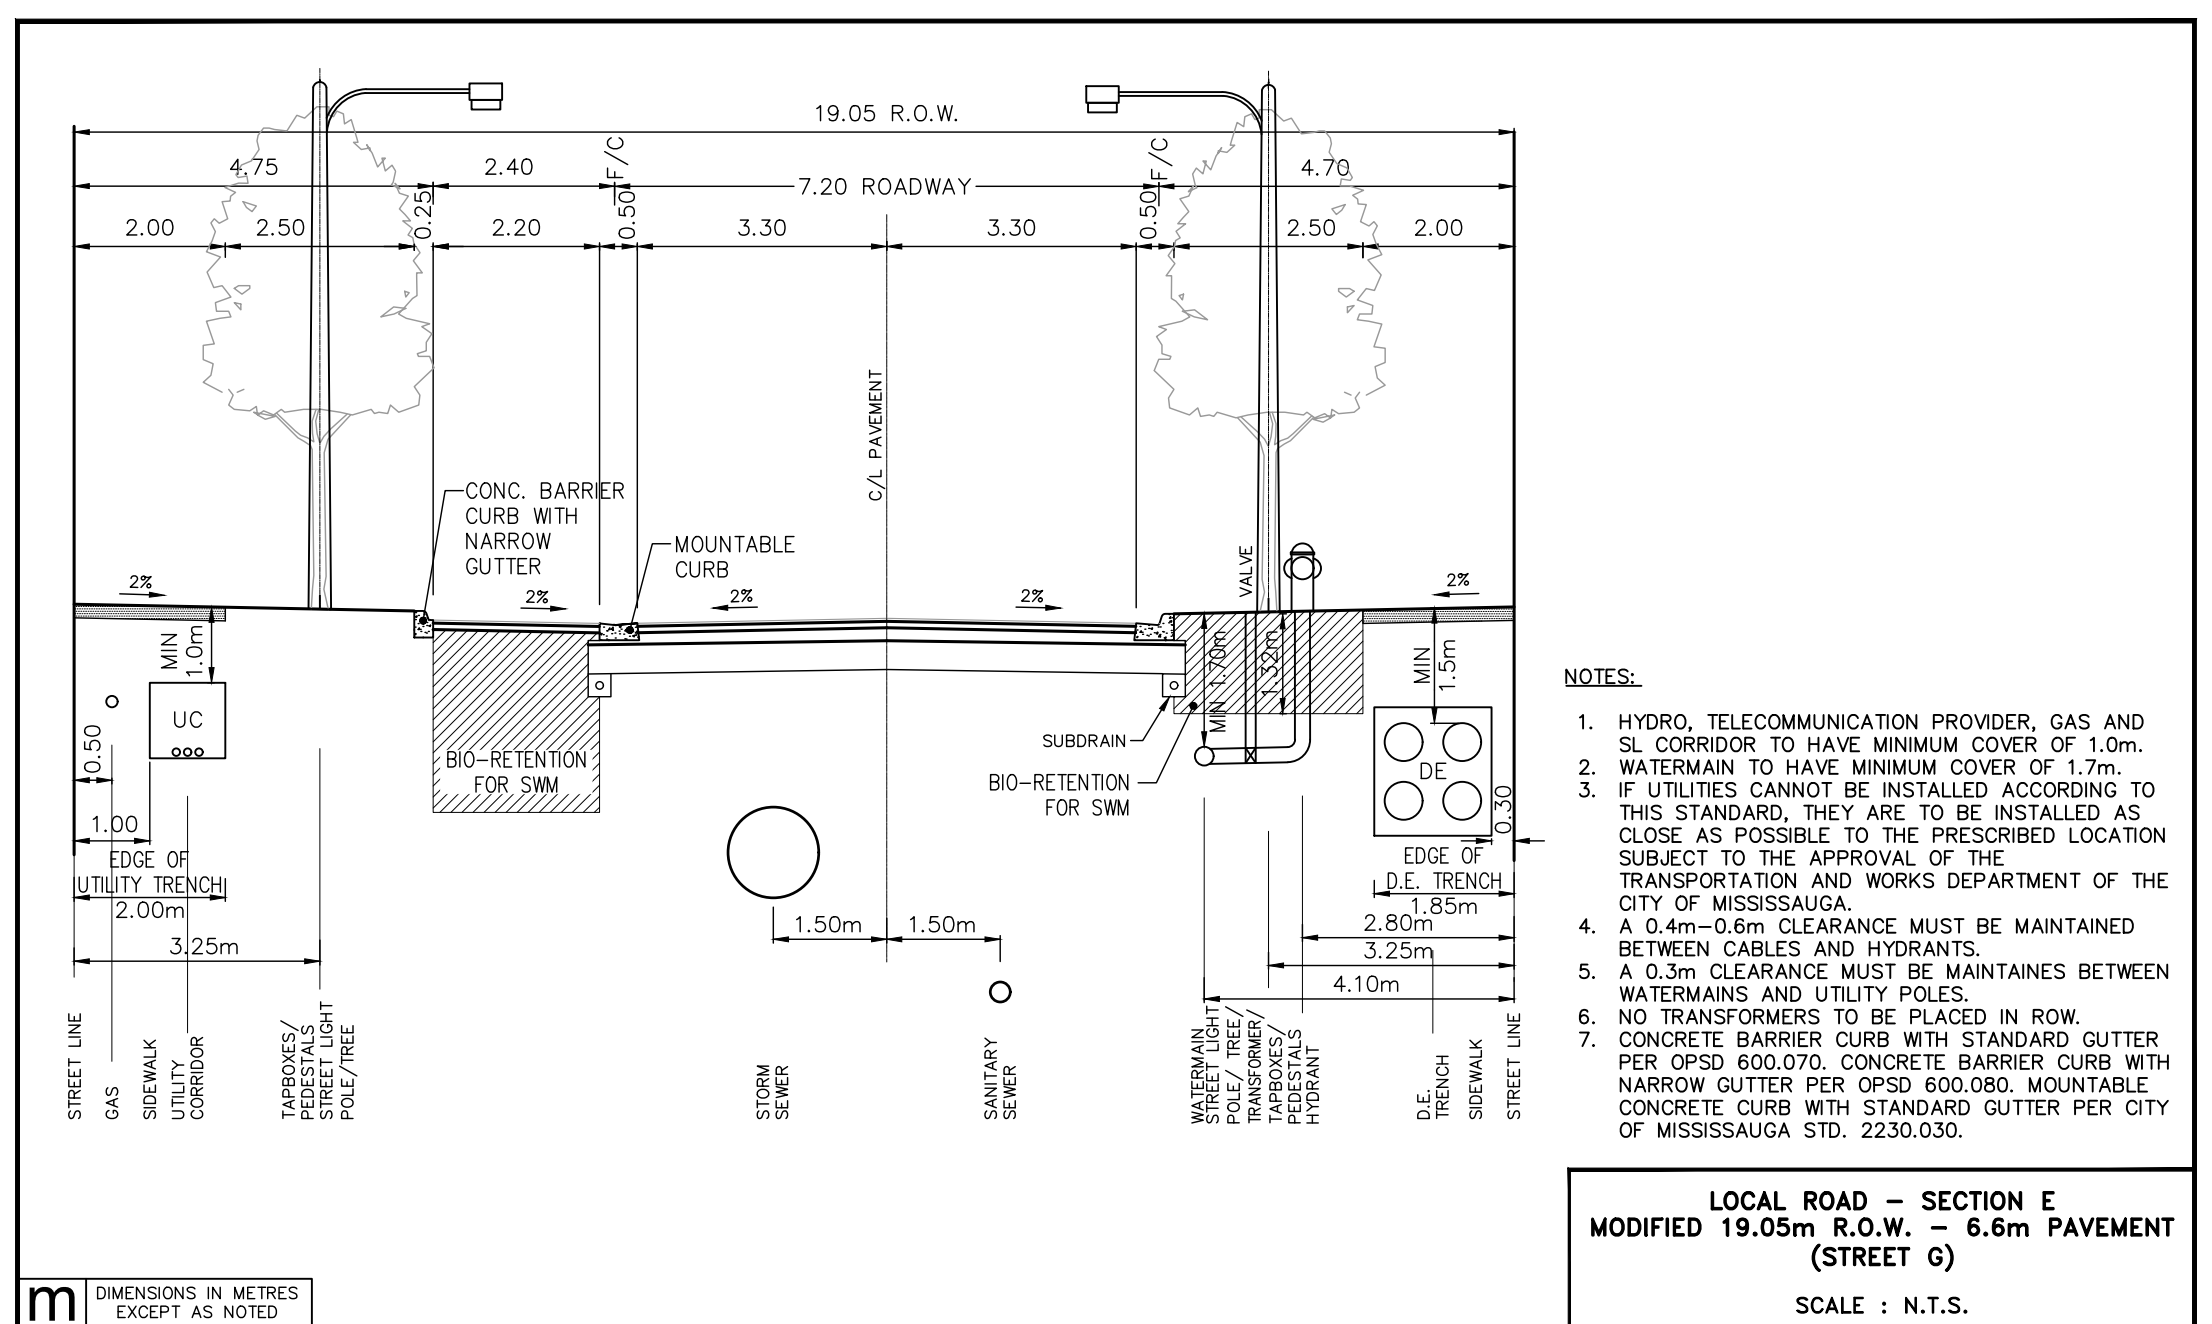

- NOTES:**
1. HYDRO, TELECOMMUNICATION PROVIDER, GAS AND SL CORRIDOR TO HAVE MINIMUM COVER OF 1.0m.
  2. WATERMAIN TO HAVE MINIMUM COVER OF 1.7m.
  3. IF UTILITIES CANNOT BE INSTALLED ACCORDING TO THIS STANDARD, THEY ARE TO BE INSTALLED AS CLOSE AS POSSIBLE TO THE PRESCRIBED LOCATION SUBJECT TO THE APPROVAL OF THE TRANSPORTATION AND WORKS DEPARTMENT OF THE CITY OF MISSISSAUGA.
  4. A 0.4m-0.6m CLEARANCE MUST BE MAINTAINED BETWEEN CABLES AND HYDRANTS.
  5. A 0.3m CLEARANCE MUST BE MAINTAINED BETWEEN WATERMANS AND UTILITY POLES.
  6. NO TRANSFORMERS TO BE PLACED IN ROW.
  7. CONCRETE BARRIER CURB WITH STANDARD GUTTER PER OPSD 600.070. CONCRETE BARRIER CURB WITH NARROW GUTTER PER OPSD 600.080. MOUNTABLE CONCRETE CURB WITH STANDARD GUTTER PER CITY OF MISSISSAUGA STD. 2230.030.

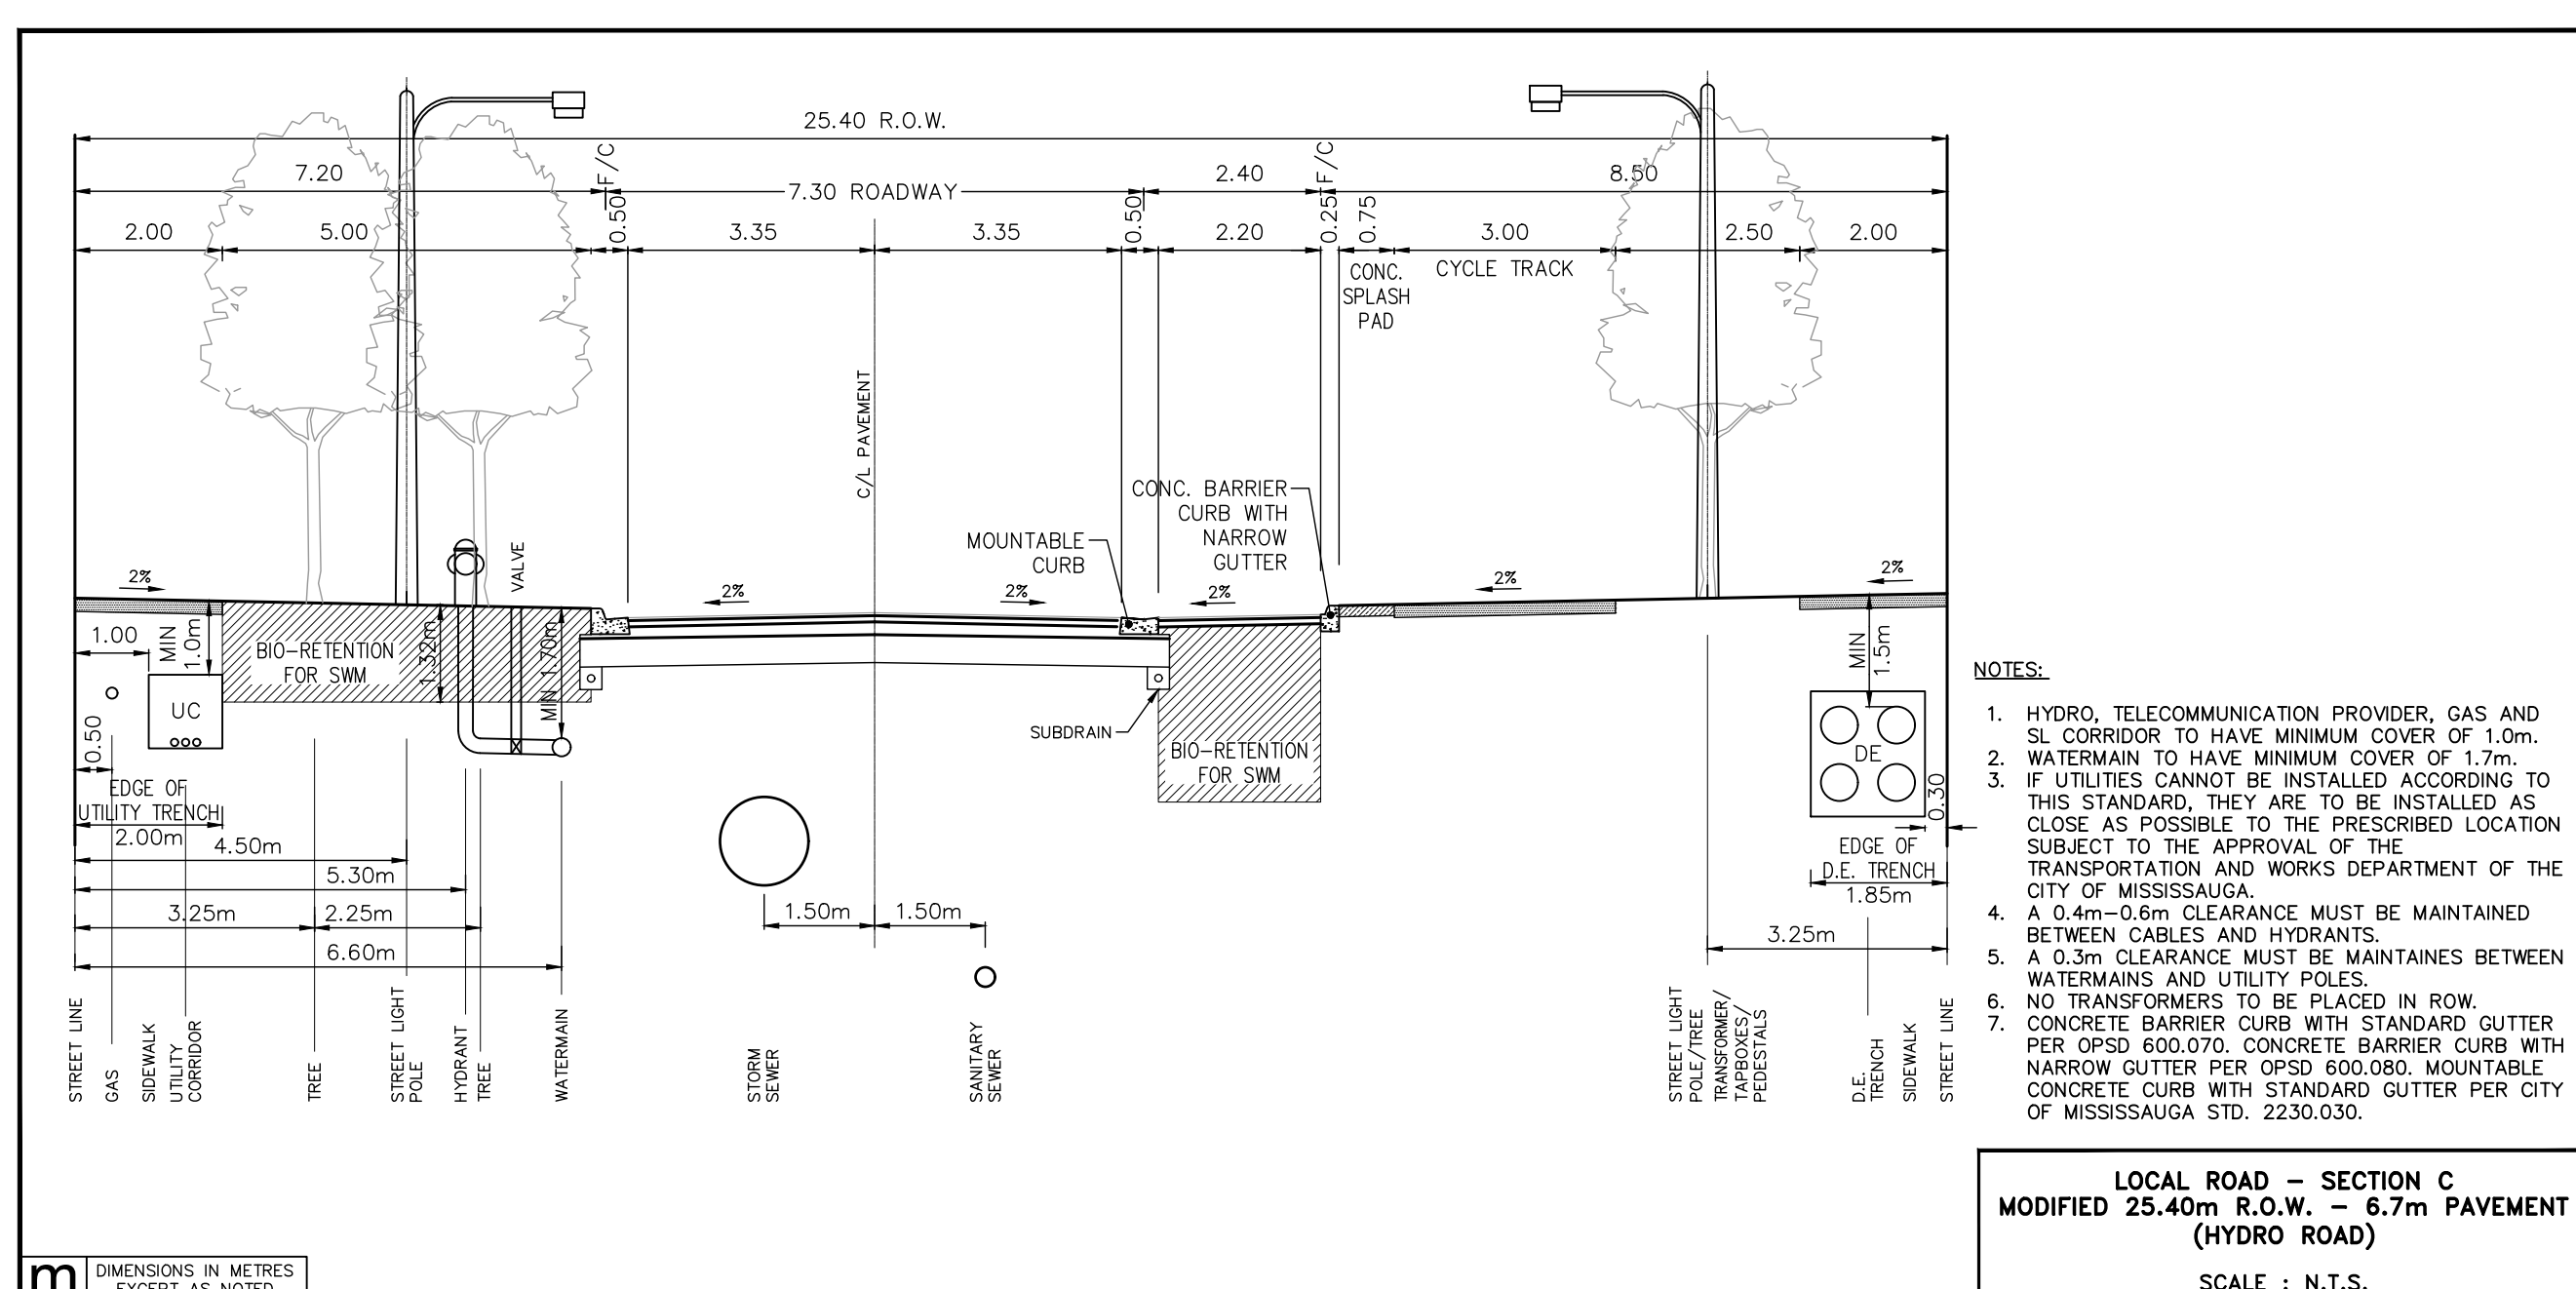

- NOTES:**
1. HYDRO, TELECOMMUNICATION PROVIDER, GAS AND SL CORRIDOR TO HAVE MINIMUM COVER OF 1.0m.
  2. WATERMAIN TO HAVE MINIMUM COVER OF 1.7m.
  3. IF UTILITIES CANNOT BE INSTALLED ACCORDING TO THIS STANDARD, THEY ARE TO BE INSTALLED AS CLOSE AS POSSIBLE TO THE PRESCRIBED LOCATION SUBJECT TO THE APPROVAL OF THE TRANSPORTATION AND WORKS DEPARTMENT OF THE CITY OF MISSISSAUGA.
  4. A 0.4m-0.6m CLEARANCE MUST BE MAINTAINED BETWEEN CABLES AND HYDRANTS.
  5. A 0.3m CLEARANCE MUST BE MAINTAINED BETWEEN WATERMANS AND UTILITY POLES.
  6. NO TRANSFORMERS TO BE PLACED IN ROW.
  7. CONCRETE BARRIER CURB WITH STANDARD GUTTER PER OPSD 600.070. CONCRETE BARRIER CURB WITH NARROW GUTTER PER OPSD 600.080. MOUNTABLE CONCRETE CURB WITH STANDARD GUTTER PER CITY OF MISSISSAUGA STD. 2230.030.

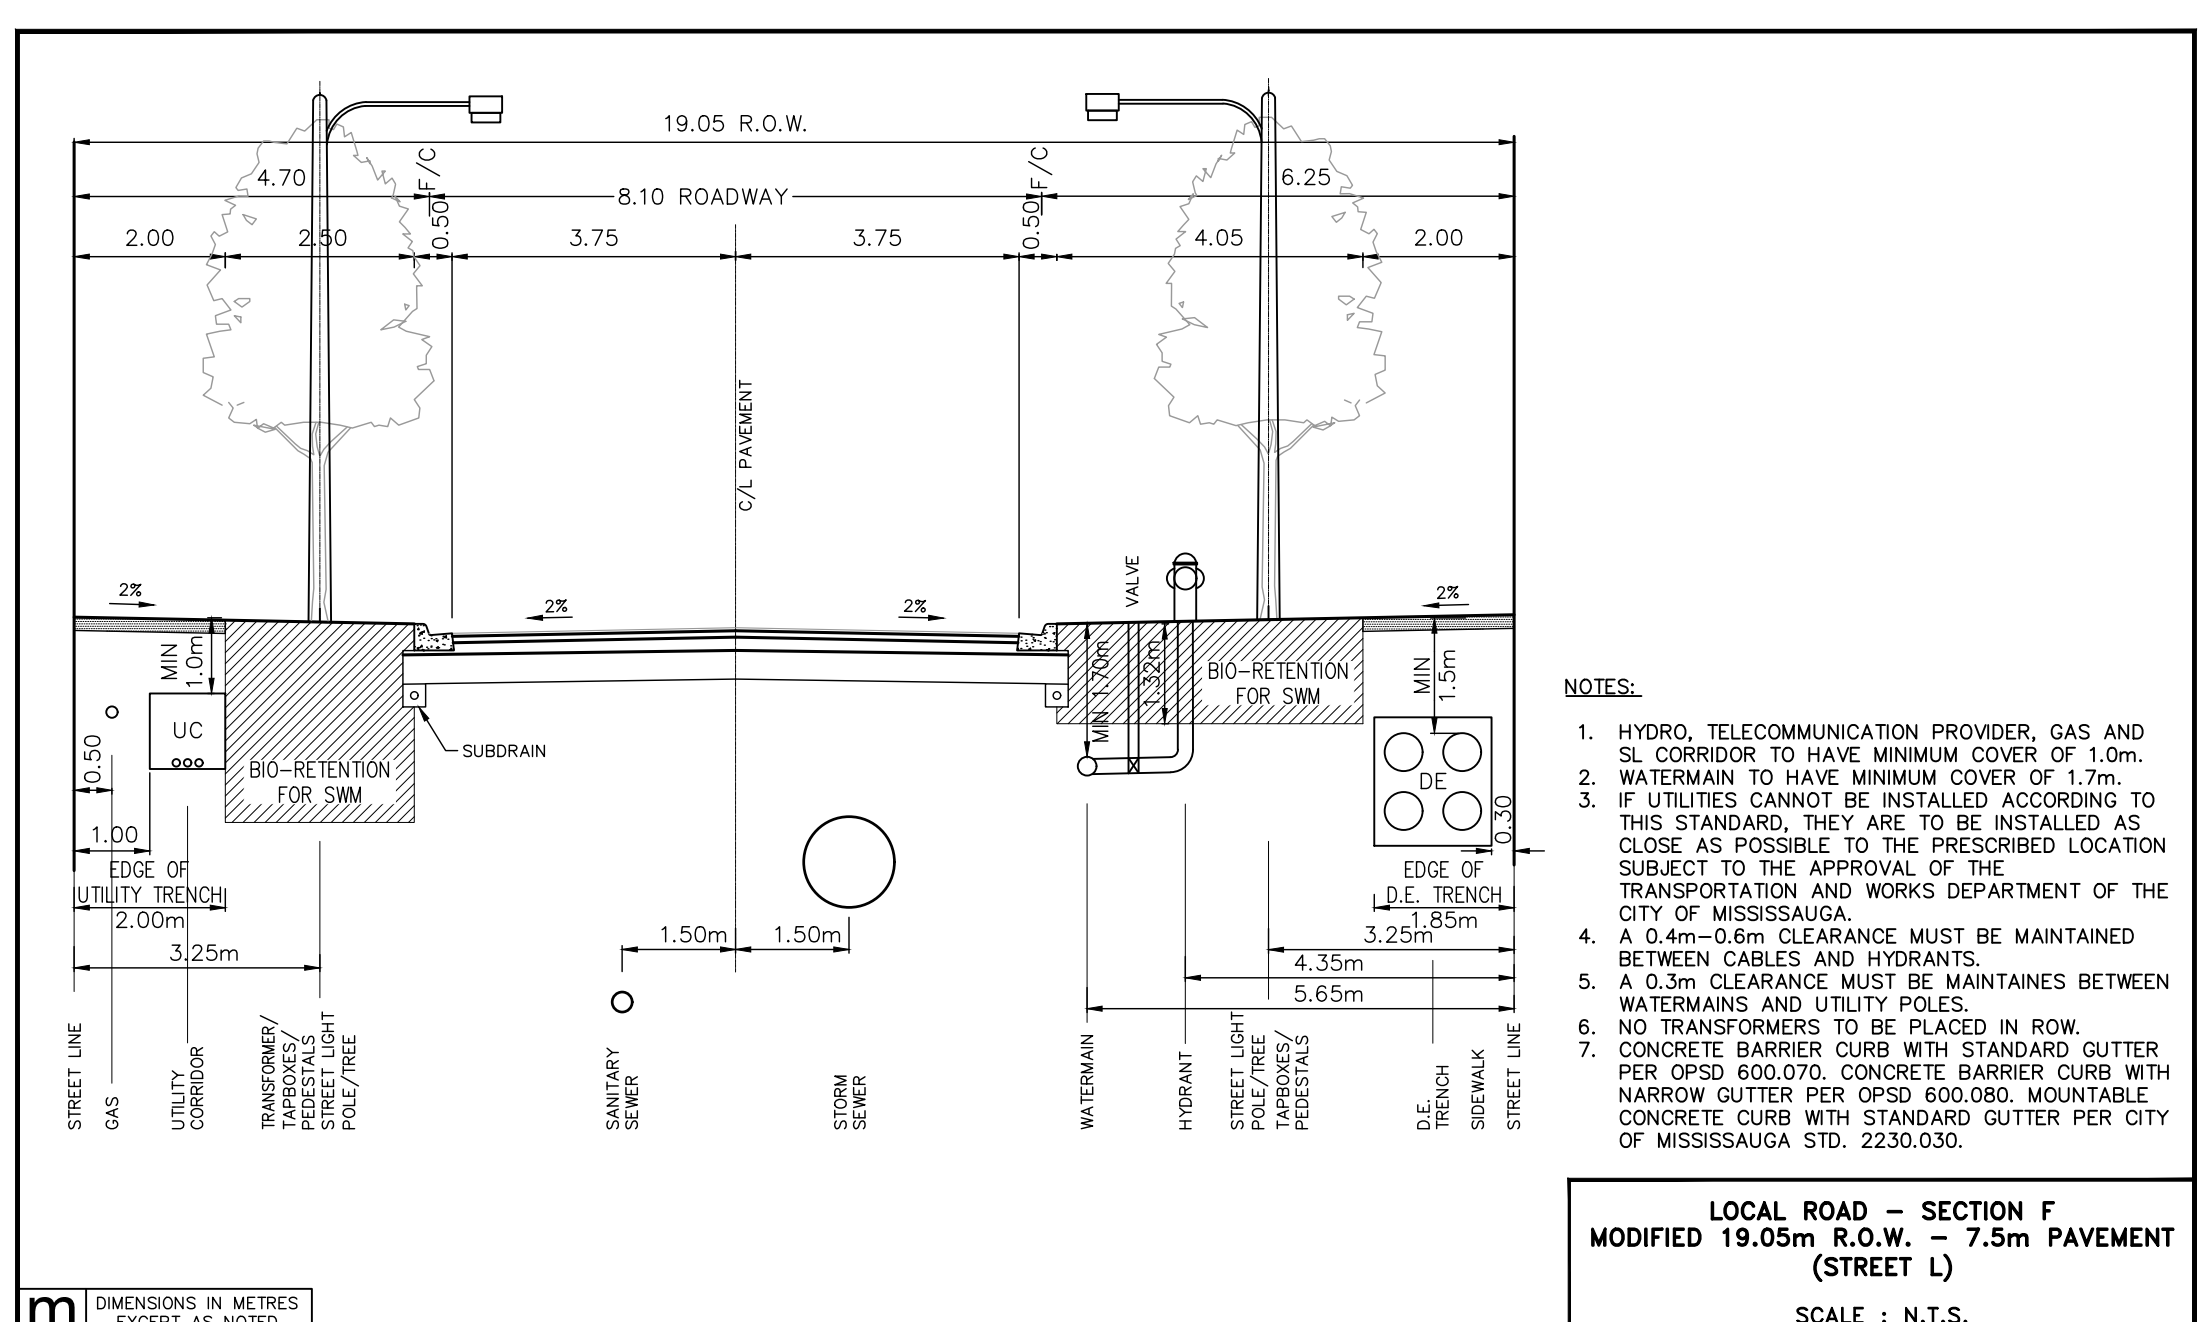

- NOTES:**
1. HYDRO, TELECOMMUNICATION PROVIDER, GAS AND SL CORRIDOR TO HAVE MINIMUM COVER OF 1.0m.
  2. WATERMAIN TO HAVE MINIMUM COVER OF 1.7m.
  3. IF UTILITIES CANNOT BE INSTALLED ACCORDING TO THIS STANDARD, THEY ARE TO BE INSTALLED AS CLOSE AS POSSIBLE TO THE PRESCRIBED LOCATION SUBJECT TO THE APPROVAL OF THE TRANSPORTATION AND WORKS DEPARTMENT OF THE CITY OF MISSISSAUGA.
  4. A 0.4m-0.6m CLEARANCE MUST BE MAINTAINED BETWEEN CABLES AND HYDRANTS.
  5. A 0.3m CLEARANCE MUST BE MAINTAINED BETWEEN WATERMANS AND UTILITY POLES.
  6. NO TRANSFORMERS TO BE PLACED IN ROW.
  7. CONCRETE BARRIER CURB WITH STANDARD GUTTER PER OPSD 600.070. CONCRETE BARRIER CURB WITH NARROW GUTTER PER OPSD 600.080. MOUNTABLE CONCRETE CURB WITH STANDARD GUTTER PER CITY OF MISSISSAUGA STD. 2230.030.

No.	Date	Issued for
2.	07/02/2024	REISSUED FOR DMP/OPA SUBMISSION
1.	05/28/2024	ISSUED FOR OPA SUBMISSION

**BENCHMARK NOTE**

APPROVED AS TO FORM IN RELIANCE UPON THE PROFESSIONAL SKILL AND ABILITY OF SCHAEFFERS CONSULTING ENGINEERS AS TO DESIGN AND SPECIFICATION

REGISTERED PROFESSIONAL ENGINEER  
H.H. TOZCU  
100130655  
07/02/2024  
PROVINCE OF ONTARIO

DIRECTOR OF DEVELOPMENT ENGINEERING DATE

**RANGEVIEW ESTATES PRECINCT AREA  
CITY OF MISSISSAUGA**

**SCHAEFFERS**  
CONSULTING ENGINEERS

6 Rontrose Drive, Concord,  
Ontario L4K 4R3  
Tel: (905) 738-6100  
Fax: (905) 738-6875  
E-mail:  
design@schaeffers.com

SCHAEFFER & ASSOCIATES LTD.



**PUBLIC RIGHT-OF-WAY SECTIONS**

DRAWN BY: M.P.	DESIGNED BY: H.H.T.	CHECKED BY: H.H.T.
SCALE: AS SHOWN	DATE: SEPTEMBER 2023	
PROJECT No. 2022-4938	DRAWING No. D-2	